



## Features:

- Supports 9.95Gb/s to 10.5Gb/s bit rates
- Hot-pluggable SFP+ footprint
- Single LC for Bi-directional Transmission
- Maximum link length of 20km
- Built-in 1270/1330 WDM
- Uncooled 1270nm or 1330nm DFB Laser.
- Power dissipation <1.5W
- No Reference Clock required
- Built-in digital diagnostic functions
- Temperature range 0°C to 70°C
- Very low EMI and excellent ESD protection
- RoHS Compliant Part

## Applications:

- 10GBASE-LR/LW 10G Ethernet
- 1200-SM-LL-L 10G Fiber Channel

## Description:

POFLINK PLS-10G-2733-10& PLS-10G-3327-10 Bi-directional 10Gb/s (SFP+) transceivers are compliant with the current SFP+ Multi-Source Agreement (MSA) Specification. They comply with 10GBASE-LR/LW Ethernet and 10G Fiber Channel 1200-SM-LL-L. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the SFP+ MSA.

## Specification:

### ● Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	T <sub>S</sub>	-40		+85	°C
Supply Voltage	V <sub>CC</sub> T, R	-0.5		4	V
Relative Humidity	RH	0		85	%

### ● Recommended Operating Environment:

Parameter	Symbol	Min.	Typical	Max.	Unit
Case operating Temperature	T <sub>C</sub>	-40		+85	°C
Supply Voltage	V <sub>CC</sub> T, R	+3.13	3.3	+3.47	V
Supply Current	I <sub>CC</sub>			300	mA
Power Dissipation	PD			1.5	W

## Shenzhen POFLink Communication Equipment Co., Ltd.

4F, Landfeng Building Kefa Rd Hi-tech Industrial Park, Nanshan, Shenzhen, China

Tel: +86 755 26014656

Fax: +86 755 26532516

E-mail: info@poflink.com

Http://www.poflink.com

● Electrical Characteristics ( $T_{OP} = 0$  to  $70\text{ }^{\circ}\text{C}$ ,  $V_{CC} = 3.13$  to  $3.47$  Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Note	
<b>Transmitter:</b>							
Differential input voltage swing		120		1200	mVpp	1	
Transmit Disable Input	H	$V_{IH}$	2.0		$V_{CC}+0.3$	V	
	L	$V_{IL}$	0		0.8	V	
Transmit Enable Output	H	$V_{OH}$	2.4		$V_{CC}+0.3$	V	
	L	$V_{OL}$	0		0.4	V	2
Input Differential Impedance	$Z_{in}$	80	100	120	$\Omega$		
<b>Receiver</b>							
Differential output voltage swing		500		800	mVpp	3	
LOS Output	H	$V_{OH}$	2.4		$V_{CC}+0.3$	V	2
	L	$V_{OL}$	0		0.4	V	
Output Differential Impedance	$Z_{on}$	80	100	120	$\Omega$		

**Notes:**

Note 1) TD+/- are internally AC coupled with  $100\Omega$  differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with  $4.7k$  to  $10k\Omega$  resistors on the host board. Pull up voltage between  $2.0V$  and  $V_{CC}+0.3V$ .

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with  $100\Omega$  (differential) at the user SERDES.

● Optical Parameters( $T_{OP} = 0$  to  $70\text{ }^{\circ}\text{C}$ ,  $V_{CC} = 3.13$  to  $3.47$  Volts)


Parameter	Symbol	Min	Typ	Max	Unit	Ref.
<b>Transmitter</b>						
Date Rate		9.9		10.5	Gb/s	
Optical Wavelength	PLS-10G-2733-10	$\lambda$	1260	1270	1280	nm
	PLS-10G-3327-10		1320	1330	1340	
Average output power	$P_o$	-1		+3	dBm	
Optical Extinction Ratio	ER	3.5			dB	
RMS spectral width	$\Delta\lambda$			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Dispersion penalty				3.2	dB	
<b>Receiver</b>						
Date Rate		9.9		10.5	Gb/s	
Optical Wavelength	PLS-10G-2733-10	$\lambda$	1320	1330	1340	nm
	PLS-10G-3327-10		1260	1270	1280	
Receiver Sensitivity@10G	R			-14.5	dBm	1
Maximum Input Power	$P_{MAX}$	0.5			dBm	
LOS De-Assert	LOSD			-15	dBm	
LOS Assert	LOSA	-30			dBm	
LOS Hysteresis		0.5		4	dB	
Receiver Reflectance				-12	dB	

**Notes:**

Note 1) 1. Measured with a PRBS of 2<sup>7</sup>-1 at 1 x 10<sup>-12</sup> BER and 3.5 dB extinction ratio.

● **Pin Assignment:**

Diagram of Host Board Connector Block Pin Numbers and Name

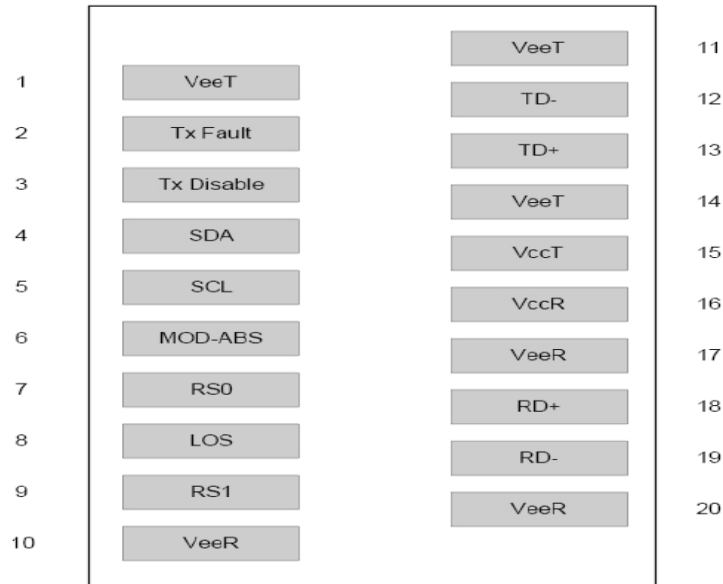

**Pin Function Definitions**

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	Note 1
2	Tx Fault	Module transmitter fault	Note 2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	Note 3
4	SDL	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	Note 2
7	RS0	Rate select0,optionally control SFP+ receiver. When high, input data rate >4.5Gb/ s;when low, input data rate <=4.5Gb/s	
8	LOS	Receiver Loss of Signal Indication	Note4
9	RS1	Rate select0,optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s;when low, input data rate <=4.5Gb/s	
10	VeeR	Module receiver ground	Note 1
11	VeeR	Module receiver ground	Note 1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	Note 1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	Note 1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	Note1

Note 1) The module ground pins shall be isolated from the module case.

Note 2) This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to

Host\_Vcc on the host board.


Note 3) This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.

Note 4) This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host\_Vcc on the host board.

### ● SFP Module EEPROM Information and Management

The PLS-10G-2733-10& PLS-10G-3327-10 SFP+ modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I2C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information(A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

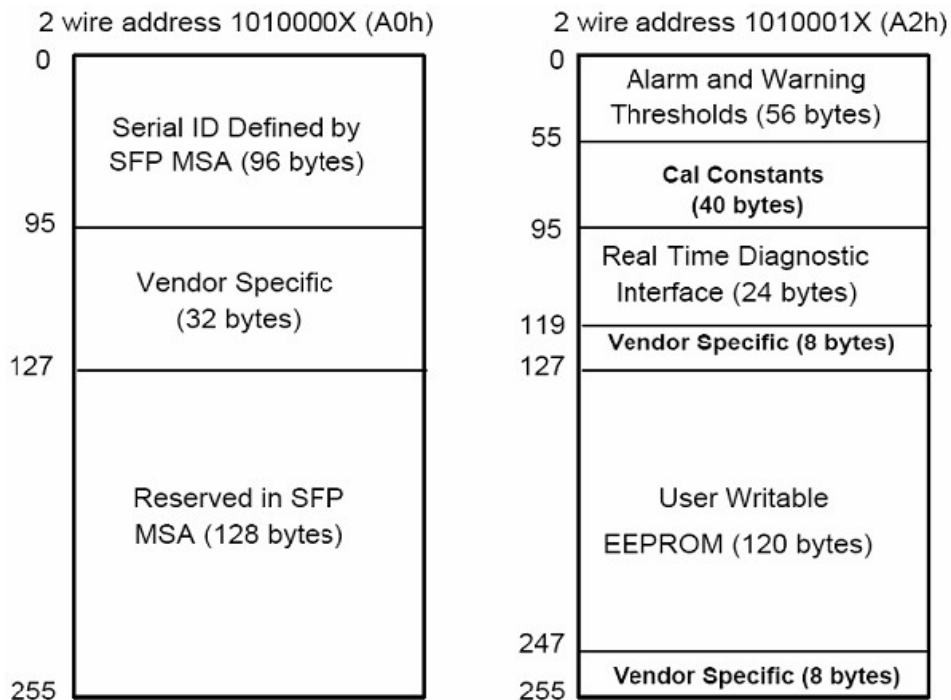

**Table 2 – EEPROM Serial ID Memory Contents (A0h)**

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	
11	1	Encoding	NRZ(03h)

### Shenzhen POFLink Communication Equipment Co., Ltd.

4F, Landfeng Building Kefa Rd Hi-tech Industrial Park, Nanshan, Shenzhen, China

Tel: +86 755 26014656

Fax: +86 755 26532516

E-mail: info@poflink.com

Http://www.poflink.com

12	1	BR,Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: POFLink
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "PLS-xx-xx" (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
<b>Extended ID Fields</b>			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	POFLink's Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
<b>Vendor Specific ID Fields</b>			
96-127	32	Readable	POFLink's specific date, read only
128-255	128	Reserved	Reserved for SFF-8079

### ● Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Range	Accuracy	Unit
96-97	Transceiver Internal Temperature	-10 to +80°C	±3.0	°C
100-101	Laser Bias Current	8 to 90mA	±10	%
100-101	Tx Output Power	-8.5 to +1dBm	±3.0	dBm
100-101	Rx Input Power	-15.5 to 0.5dBm	±3.0	dBm
100-101	VCC3 Internal Supply Voltage	+3.0V to +3.7V	±3.0	%

### ● Regulatory Compliance


The PLS-10G-2733-10& PLS-10G-3327-10 complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11	Compatible with Class 1 laser


### Shenzhen POFLink Communication Equipment Co., Ltd.

EN60950, EN (IEC) 60825-1,2	product.
-----------------------------	----------

● Recommended Circuit:

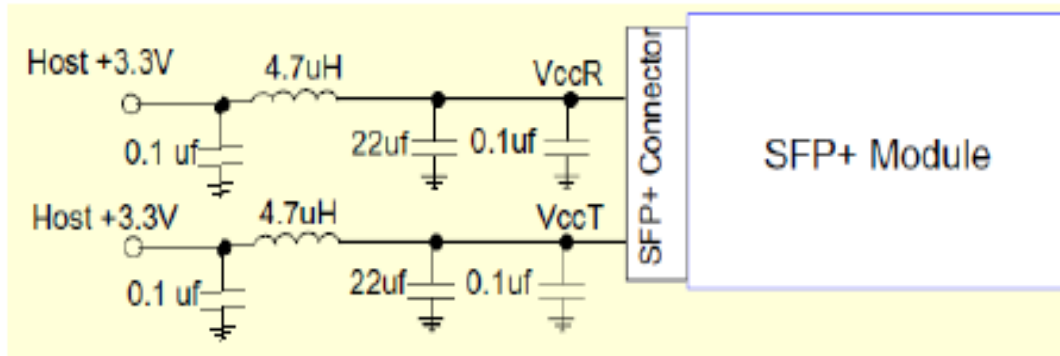

Recommended Host Board Power Supply Circuit

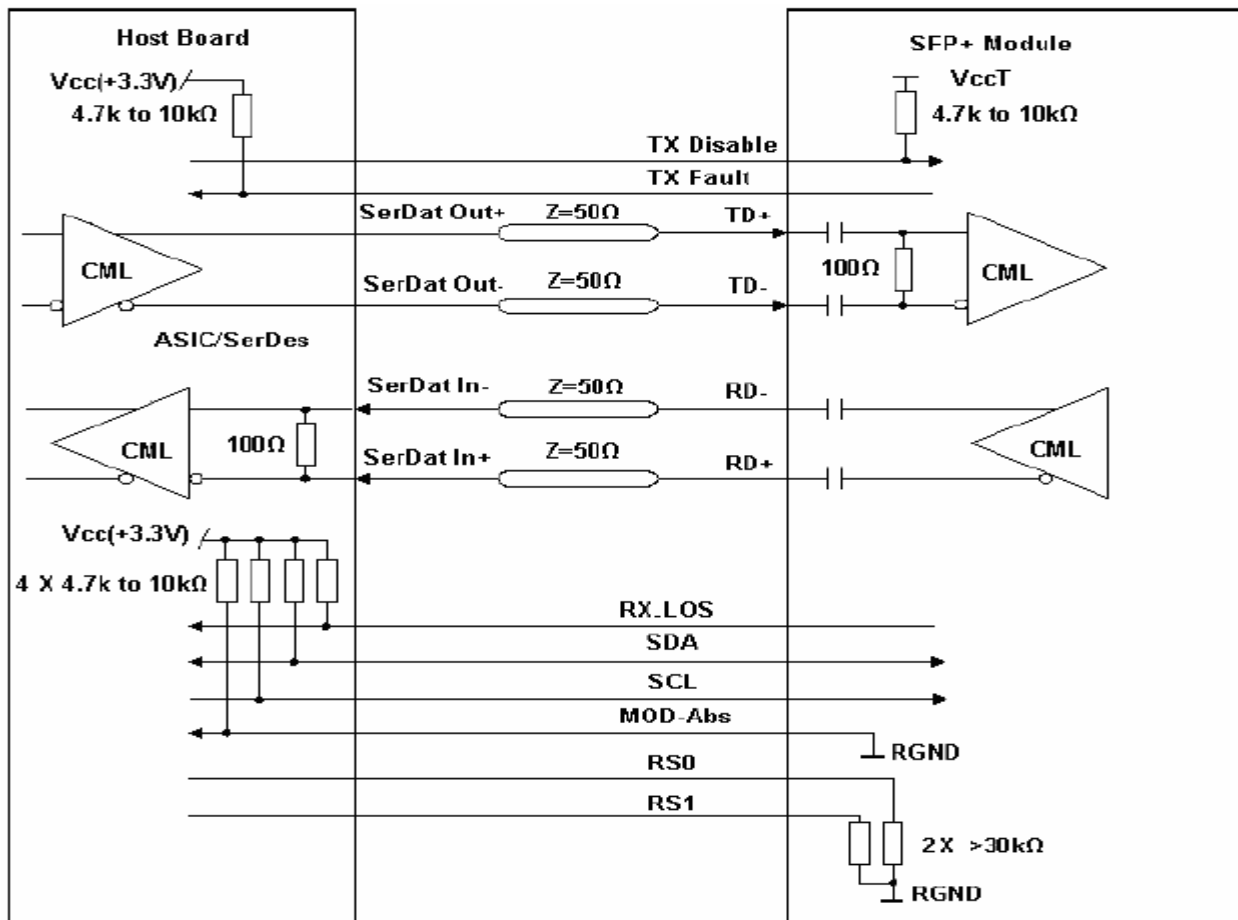

Recommended High-speed Interface Circuit